

ServSwitch™ KVM Short-Range Extender Kits


Remotely locate a PS/2 or USB keyboard, monitor, and mouse (KVM) console up to 75 feet (23.4 m) from a computer.



FEATURES

- › Connect the computer unit and console (station) unit via CAT5 UTP cable.
- › Remotely locate the keyboard, monitor, and mouse up to 23.4 m from a computer.
- › Versions available to support either a USB or PS/2 console.
- › Use low-cost, readily-available cable.
- › LED indicator enables you to verify power is connected.
- › Locate the computer away from your desk and work area, freeing up valuable space.
- › Beep sound confirms key control.
- › Support common mice such as Microsoft® IntelliMouse® (Pro), Explorer, Optical, etc.

Typical ACU075A-PS2 application: (1) console to (1) computer configuration.

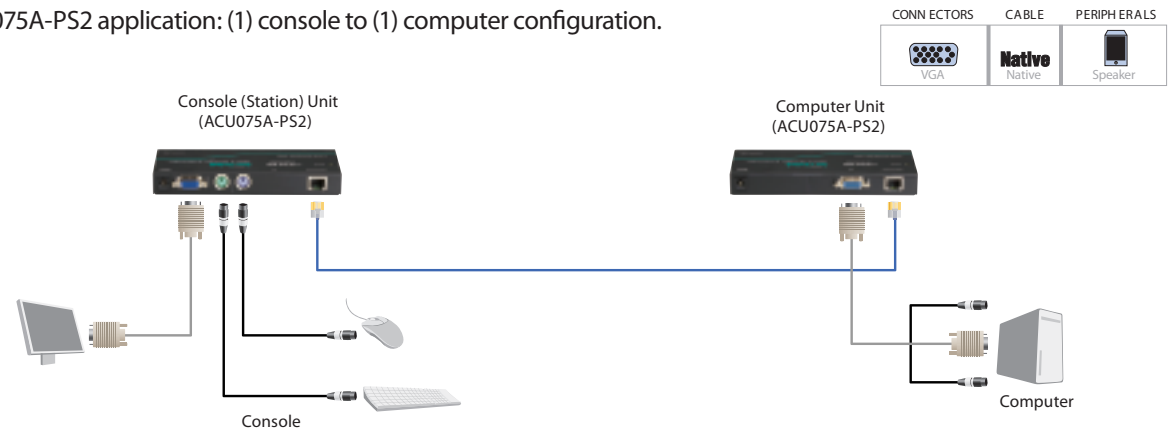

Typical ACU075A-USB application: (1) console to (1) computer configuration.



OVERVIEW

Choose the ServSwitch KVM Short-Range Extender Kits to place a PS/2 or USB keyboard/monitor/mouse up to 23.4 metres from a computer. The ServSwitch Short-Range Extender Kits use inexpensive CAT5 unshielded twisted pair (UTP) cable.

Two models are available:

- ServSwitch KVM Short-Range Extender Kit (PS/2): ACU075A-PS2
- ServSwitch KVM Short-Range Extender Kit (USB): ACU075A-USB

Each model consists of a console unit and a computer unit. The console unit links to the keyboard, monitor, and mouse. The computer unit connects to the computer.

Hotkeys

Use hotkeys to adjust the video compensation and set the equalisation on the console unit for an optimum video signal and its corresponding cable length.

LED indicators on the console and computer units light when power is connected.

For PS/2 only, adjust the mouse resynchronisation. Also for PS/2 only, you can adjust the console unit's keyboard speed (choose from 6, 12, 20, and 30 characters per second).

TECH SPECS

Resolution — 1280 x 1024 @ 23.4 m
 Connectors — ACU075A-USB: Console (Station) Unit: (1) HD15 F, (1) RJ-45, (2) USB Type A F, (1) barrel connector;
 Computer Unit: (1) HD15 F, (1) RJ-45, (1) barrel connector;
 ACU075A-PS2: Console (Station) Unit: (1) HD15 F, (1) RJ-45, (2) 6-pin mini DIN, (1) barrel connector;
 Computer Unit: (1) HD15 F, (1) RJ-45, (1) barrel connector
 Indicators — ACU075A-USB, ACU075A-PS2:
 Console (Station) Unit: (1) On LED;
 Computer Unit: (1) On LED
 Power — External 9-VDC, 600 mA power supply
 Dimensions — 2H x 15.6W x 6.5D cm
 Weight — Each transmitter or receiver unit: 0.3 kg



ACU075A-PS2: front view:
 top: Console Unit;
 bottom: Computer Unit



ACU075A-PS2: back view:
 top: Computer Unit;
 bottom: Console Unit



ACU075A-USB: back view:
 top: Computer Unit;
 bottom: Console Unit

What's included

ACU075 A-PS2:

- KVM Extender Console (Station) Unit
- KVM Extender Computer Unit
- 9-VDC, 600-mA power adapter
- (2) sets of foot pads
- (1) KVM Cable 3-to-1 (EHN70001-0006)
- User's manual

ACU075 A-USB:

- KVM Extender Console (Station) Unit
- KVM Extender Computer Unit
- 9-VDC, 600-mA power adapter
- (2) sets of foot pads
- (1) KVM Cable 2-to-1 (EHN9000U-0006)
- User's manual

Item

Code

ServSwitch KVM Short-Range Extender Kits
 PS/2
 USB

ACU075 A-PS2
 ACU075 A-USB