

Mini Extender for DVI-D and Stereo Audio over Fiber

Distribute DVI-D video and stereo audio up to 1.5 kilometres over a single strand of fibre.



FEATURES

- › Delivers high-quality multimedia content in real time from a media player to a distant screen while maintaining crystal-clear video. A high-definition video signal from a single player to a display can be extended up to 1.5 kilometres without electrical support for splitters.
- › Provides optical isolation and immunity to EMI/RFI.
- › The DVI Extender increases the range of the display network and enables you to set up your screens at any locations without sacrificing the quality of media.
- › Supports audio extension. The DVI Extender transmits both audio and video over a single fibre optic cable.
- › Extends all DVI VESA standards all the way up to a 1920 x 1200 resolution.
- › Offers programmable EDID. The transmitter reads and stores the display's EDID information to support any type of display and video resolution.
- › Consumes very little power. Transmitters and receivers consume 3 W or less for transmitting and receiving Full HD resolution video signals and CD-quality audio.
- › Split, extend, and distribute DVI video and stereo audio using the passive fibre splitters.

OVERVIEW

The DVI Extender transmits high-quality video signal formats and audio to up to 32 remote displays using passive optical splitters, without compromising the original media quality. The DVI Extender delivers a full HD resolution signal through one fibre optic cable up to 1.5 kilometres. It's an ideal solution for systems where high-resolution and high-quality video signals need to be extended and distributed over long distances. Fibre optic cabling ensures 100% optical isolation between transmitter and receiver and also makes this a solution ideal for applications with a high level of EMI/RFI.


Connect the extender in a point-to-point configuration to transmit high-resolution video to a remote display. The transmitter module is compatible with all kinds of display devices. In addition to its built in EDID table, it has the ability to read and store the connected display's EDID information to prevent EDID handshake problems. Installing the extender is easy and flexible.

Connect the extender in a point-to-multipoint configuration to distribute high-resolution video to up to 32 displays. Use the 4- and 8-port splitters to distribute video from one source to 4 or 8 displays, or use the cascable 2-port splitter to daisy chain several displays. It is even possible to combine different splitters, depending on the optical budget. All splitters are passive devices and do not require external power.

Typical applications include public informational displays in elevators, trains, subways, airports, shopping malls, museums, or hotels.

Use the DVI Extender with an LC fibre optic cable.

System configuration: The transmitter module encodes the audio/video signal into an optical signal and the receiver module decodes the optical signal back into the original audio/video signal.

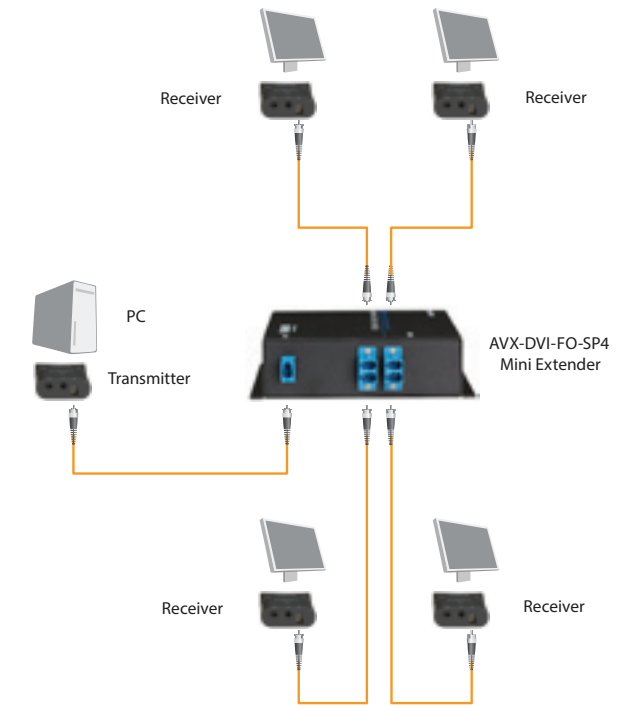

What's included

AVX-DVI-FO-MINI:

- * Mini Fibre Transceiver
- * Mini Fibre Receiver
- * (2) 5-VDC wallmount power supplies with international adapters for U.S., U.K., AU, and EU
- * (2) 5-ft. (1.5-m) male-male 3.5-mm audio cables
- * A user's manual

AVX-DVI-FO-MINI-RX:

- * Mini Fibre Receiver
- * (1) 5-VDC wallmount power supply with international adapters for U.S., U.K., AU, and EU
- * (1) 5-ft. (1.5-m) male-male 3.5-mm audio cables
- * A user's manual

AVX-DVI-FO-SPCS:

- (1) 2-Port Fibre Splitter

AVX-DVI-FO-SP4:

- (1) 4-Port Fibre Splitter

AVX-DVI-FO-SPC8:

- (1) 8-Port Fibre Splitter

TECH SPECS

Colour Depth — 24-bit true colour
 Data Rate — 5 Gbps (2.5 Gbps per single wavelength)
 Distance — Multimode cable: 1600 ft. (500 m);
 Single-mode cable: 5000 ft. (1.5 km)
 Fibre Type — Single-mode or multimode
 Optical Budget — 16 dB
 Receiver Sensitivity — -21 dB
 Resolutions — Supports up to WUXGA (1920 x 1200)
 Wavelength — 1310 nm/1550 nm (dual wavelength)
 Operating Temperature — 0 to 50° C
 Power Consumption — 2.5 W max.
 Video Standard — Complies with DVI 1.0
 Indicators — (1) two-colour LED for Power and Link status
 Connectors — AVX-DVI-FO (kit): Receiver: (1) 24-pin DVI-D, (2) 3.5-mm audio,
 (1) barrel connector for power;
 Transmitter: (1) 24-pin DVI-D, (2) 3.5-mm audio, (1) barrel connector for
 power;
 Splitters: AVX-DVI-FO-SPCS: (3) LC connectors: (1) for interconnect, (4) for
 devices;
 AVX-DVI-FO-SP4: (5) LC connectors: (1) for interconnect, (4) for devices;
 AVX-DVI-FO-SP8: (9) LC connectors: (1) for interconnect, (8) for devices

NOTE: The splitters transmit both audio and video signals over one single-strand, single-mode fibre cable.

Dimensions — 1.5H x 3.9W x 6.9D cm

Weight — 0.1 kg

Item

Code

Mini Extender Kit for DVI-D and Stereo Audio over Fibre Receiver	AVX-DVI-FO-MINI AVX-DVI-FO-RX
Fibre Splitters	
2-Port	AVX-DVI-FO-SPCS
4-Port	AVX-DVI-FO-SP4
8-Port	AVX-DVI-FO-SP8



AVX-DVI-FO-MINI



AVX-DVI-FO-SPCS



AVX-DVI-FO-SP8