

## Tamper Resistant Fibre Wallbox

Super economical  
and built tough.




FEATURES

- » Cable management kit included.
- » Interchangeable modular adapter panels.
- » Accepts one fibre adapter panel.
- » Fitted with security screws.
- » Extended lid protects patchcords from being accidentally disconnected.
- » Strength member tie position.
- » Suitable for pre-terminated cable or splicing.
- » IP20 rated.

OVERVIEW

Our tamper resistant wall enclosures can be assembled to fit any installation requirements, offering a wide range of flexibility to the end user. The standard enclosure includes the newly designed speedway spool to protect the bend radius of each fibre, cable gland for incoming fibre and splice holders.

SCHEMATIC

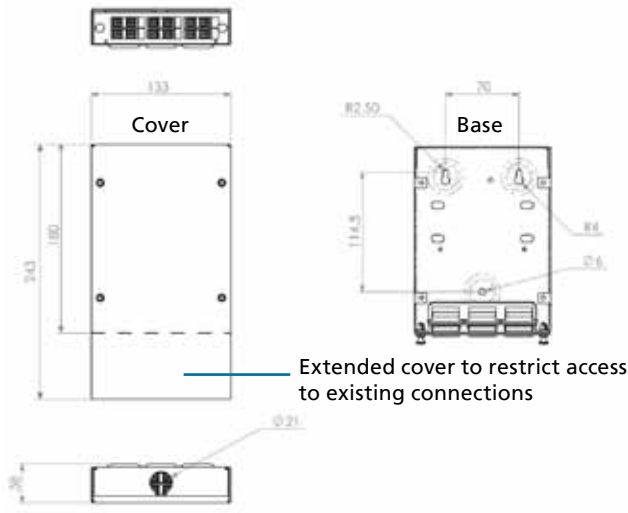

TECH SPECS

Dimensions — 24.3H x 13.3W x 3.8D cm  
Weight — 0.8 kg  
Compatible Adapters — ST, FC, SC Simplex, LC Duplex, E2000  
Number of Fibres — Up to 16  
Material — Cold-rolled steel  
Material Thickness — 1.2 mm  
Material Coating — Powder coated  
Colour — JPU008-GY: RAL7035; JPU008-BK: RAL9004  
Operating Temperature — -40 to +60°C  
Standards — TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754, EN297-1

Item	Code
Empty	
Tamper Resistant Fibre Wallbox, Grey	JPU008-GY
Tamper Resistant Fibre Wallbox, Black	JPU008-BK
Pre-loaded	
(6) LC Multimode, Grey	FPU-6LCMM-GY
(6) LC Multimode, Black	FPU-6LCMM-BK
(6) LC Single-Mode, Grey	FPU-6LCSM-GY
(6) LC Single-Mode, Black	FPU-6LCSM-BK
(6) SC Multimode, Grey	FPU-6SCMM-GY
(6) SC Multimode, Black	FPU-6SCMM-BK
(6) SC Single-Mode, Grey	FPU-6SCSM-GY
(6) SC Single-Mode, Black	FPU-6SCSM-BK
(8) ST Multimode, Grey	FPU-6STMM-GY
(8) ST Multimode, Black	FPU-6STMM-BK
(8) ST Single-Mode, Grey	FPU-6STSM-GY
(8) ST Single-Mode, Black	FPU-6STSM-BK