

Product Data Sheet

4K Quad MultiViewer



Overview

The 4K Quad MultiViewer is a high-end, cost-effective video scaler designed to enable true 4K @ 60 Hz video sources and show them on a single display, handling virtually any resolution up to 4K @ 60 Hz. It provides (3) HDMI inputs, (1) VGA input, (1) DisplayPort input, (1) HDMI output and (1) DP loop out.

Basic Features

The 4K Quad MultiViewer supports the following features:

- ◆ 4K @ 60 Hz video outputs, the HDMI out supports full screen/PIP/POP/multiview and the DisplayPort out shows a loop through of the DisplayPort input
- ◆ (14) different screen layouts including (6) preset screen layouts and (8) extra customizable screen layouts
- ◆ Input resolution up to 4K @ 60 Hz, 4:4:4 color sampling
- ◆ Output resolution up to 4K @ 60 Hz, 4:4:4 color sampling
- ◆ Upscaling up to 4K @ 60 Hz, 4:4:4 color sampling
- ◆ Deep Color and HDCP 1.4 / 2.2
- ◆ Fast switching between input channels or screen layout modes
- ◆ Rotation R90°/ L90° or flip output in full screen layout
- ◆ Dolby Digital® 5.1, DTS® 5.1 and uncompressed 7.1 linear PCM audio includes stereo analog audio input
- ◆ Stereo audio output
- ◆ Front panel button, IR remote control, RS-232/Telnet and Web UI control
- ◆ USB port firmware upgrade


4K Quad Multiviewer 5 x 1 Data Sheet

Specifications

TABLE 1. SPECIFICATIONS

SPECIFICATION	DESCRIPTION
Connectors	
Input	(3) HDMI 2.0 locking; (1) DisplayPort 1.2; (1) VGA; (1) Audio In
Output	(1) HDMI 2.0 locking; (1) DisplayPort 1.2; (1) Audio Out
Ethernet Port	(1) RJ-45
RS-232/Telnet	Web UI
Firmware Upgrade	(1) USB 2.0
Indicators	
LEDs	(1) Input (blue); (1) Layout (blue); (1) Input Swap (blue); (1) Panel Lock (blue); (1) Standby On (red); (1) Standby Off (green)
User Controls	
Front-Panel Buttons	(5) Input buttons: HDMI1-HDMI3, DP, VGA; (5) Layout buttons: A through E; (1) Input Swap button; (1) Panel Lock button; (1) Standby button
Front Panel Receiver	(1) IR Remote Control Receiver
Back-Panel Button	(1) Power ON/OFF switch
Video Output Resolution	
Resolution	4096 x 2160 @ 60 Hz, 4:4:4 color sampling
Power	
Power Supply	(1) 12-VDC, 1-A locking barrel connector
Power Consumption	15 W
Environment	
Operating Temperature	32 to 113° F (0 to 45° C)
Operating Humidity	20 to 90% relative humidity
Storage Temperature	-4 to +140° F (-20 to +60° C)
Physical	
Dimensions	1.77"H (1U) x 9.1"W x 17.3"D (4.5 x 23 x 44 cm)
Weight	5.98 lb. (2.72 kg)

Typical Application

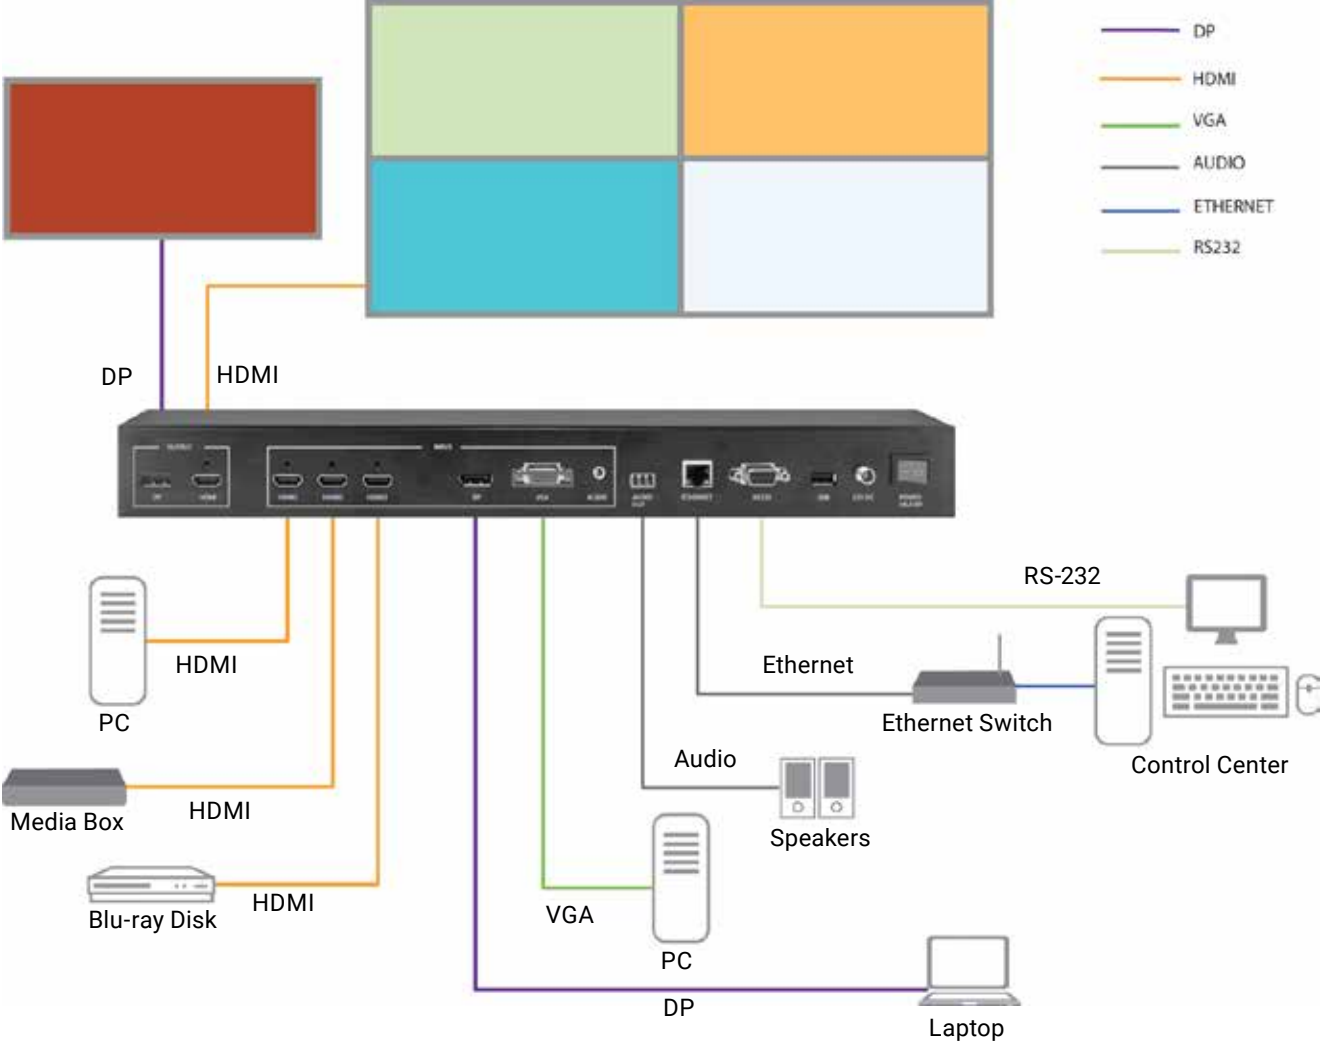

4K Quad Multiviewer 5 x 1 Data Sheet

Disclaimer:

Black Box Network Services shall not be liable for damages of any kind, including, but not limited to, punitive, consequential or cost of cover damages, resulting from any errors in the product information or specifications set forth in this document and Black Box Network Services may revise this document at any time without notice.

About Black Box:

Black Box is a world leading technology solutions provider specializing in complete high-performance KVM, professional A/V signal distribution and extension and switching solutions for mission-critical applications. Black Box is dedicated to delivering superior project engineering, technical support, and 24/7 customer service you can rely on for your most critical operations. Every day, our customers trust us to design, integrate, and maintain reliable control room solutions for broadcasting, post-production, stadiums & arenas, medical, air traffic control, oil & gas, government & military, and utility industries. Leave the tech to us and our comprehensive technology solutions will deliver secure connections, fast-response times, real-time collaboration and more.

© Copyright 2017. Black Box Corporation. All rights reserved. Black Box® and the Double Diamond logo are registered trademarks of BB Technologies, Inc. Any third-party trademarks appearing in this publication are acknowledged to be the property of their respective owners.