

DATA SHEET

LSP444

10GBASE-T COPPER SFP+ TRANSCEIVER



BLACK BOX

OVERVIEW

10GBASE-T COPPER SFP+ TRANSCEIVER DATA SHEET

INTRODUCTION

LSP444 Copper Small Form Pluggable (SFP) transceivers are based on the SFP Multi Source Agreement (MSA). They are compatible with the 10Gbase-T standards as specified in IEEE Std 802.3. LSP444 uses the SFP's RX_LOS (must be pulled up on host) pin for link indication. If you pull up or open SFP's TX_DISABLE pin, PHY IC will be reset.

FEATURES

- SUPPORTS 10GBASE-T ON LINE PORT
- SUPPORTS 10GBASE-R ON HOST PORT
- HOT-PLUGGABLE SFP FOOTPRINT
- COMPACT RJ-45 CONNECTOR ASSEMBLY
- ROHS COMPLIANT AND LEAD-FREE
- SINGLE +3.3V POWER SUPPLY
- 10 GIGABIT ETHERNET OVER CAT 6A CABLE
- AMBIENT OPERATING TEMPERATURE: -40°C TO +85°C
- UP TO 30M REACH OVER CAT 6A CABLE
- LOWER POWER CONSUMPTION

SFP TO HOST CONNECTOR PIN OUT

Pin	Symbol	Name/Description	Ref.
1	VEET	Transmitter Ground (Common with Receiver Ground)	
2	TFAULT	Transmitter Fault. Not supported.	
3	TDIS	Transmitter Disable. Laser output disabled on high or open.	1
4	MOD_DEF(2)	Module Definition 2. Data line for Serial ID.	2
5	MOD_DEF(1)	Module Definition 1. Clock line for Serial ID.	2
6	MOD_DEF(0)	Module Definition 0. Grounded within the module.	2
7	RS0	No connection required	
8	LOS	High indicates no linked. low indicates linked.	
9	RS1	No connection required	
10	VEER	Receiver Ground (Common with Transmitter Ground)	
11	VEER	Receiver Ground (Common with Transmitter Ground)	
12	RD-	Receiver Inverted DATA out. AC Coupled	
13	RD+	Receiver Non-inverted DATA out. AC Coupled	
14	VEER	Receiver Ground (Common with Transmitter Ground)	
15	VCCR	Receiver Power Supply	
16	VCCT	Transmitter Power Supply	
17	VEET	Transmitter Ground (Common with Receiver Ground)	
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	VEET	Transmitter Ground (Common with Receiver Ground)	

NOTES:


1. PHY disabled on TDIS > 2.0V or open; enabled on TDIS < 0.8V
2. Should be pulled up with 4.7k - 10k Ohms on host board to a voltage between 2.0 V and 3.6 V. MOD_DEF(0) pulls line low to indicate the module is plugged in.

CABLE LENGTH

Line Port	Cable	Reach	Host Port
10Gbase-T	CAT6A F/FTP	30m	10GBase-R

HOST BOARD CONNECTOR

BLOCK PIN NUMBERS AND NAME DIAGRAM

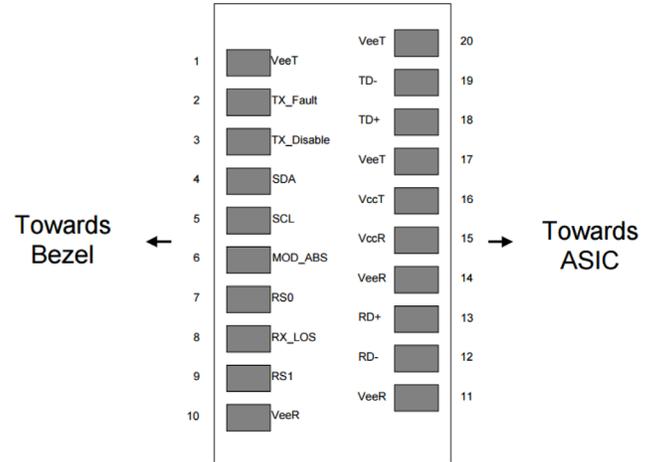

+3.3V VOLT ELECTRICAL POWER INTERFACE

The SFP+-10GBASE-T has an input voltage range of 3.3 V +/- 5%. The 4V maximum voltage is not allowed for continuous operation.

Caution: Power consumption and surge current are higher than the specified values in the SFP MSA.

+3.3 Volt Electrical Power Interface						
Parameter	Symbol	Min	Typ	Max	unit	Notes/Conditions
Supply Current	Is		540	650	mA	
Input Voltage	Vcc	3.13	3.3	3.47	V	Referenced to GND
Maximum Voltage	Vmax			4	V	

LOW-SPEED SIGNALS

MOD_DEF(1) (SCL) and MOD_DEF(2) (SDA), are open drain CMOS signals (Refer to "Serial Communication Protocol" section). Both MOD_DEF(1) and MOD_DEF(2) must be pulled up to host_Vcc.

Low-Speed Signals, Electronic Characteristics						
Parameter	Symbol	Min	Max	unit	Notes/Conditions	
SFP Output LOW	VOL	0	0.5	V	4.7k to 10k pull-up to host_Vcc, measured at host side of connector	
SFP Output HIGH	VOH	host_Vcc - 0.5	host_Vcc + 0.3	V	4.7k to 10k pull-up to host_Vcc, measured at host side of connector	
SFP Input LOW	VIL	0	0.8	V	4.7k to 10k pull-up to Vcc, measured at SFP side of connector	
SFP Input HIGH	VIH	2	Vcc + 0.3	V	4.7k to 10k pull-up to Vcc, measured at SFP side of connector	



OVERVIEW

10GBASE-T COPPER SFP+ TRANSCEIVER DATA SHEET

HIGH-SPEED ELECTRICAL INTERFACE

All high-speed signals are AC-coupled internally.

High-Speed Electrical Interface, Transmission Line-SFP						
Parameter	Symbol	Min	Typ	Max	unit	Notes/Conditions
Line Frequency	fL		125		MHz	5-level encoding, per IEEE 802.3
Tx Output Impedance	Zout,TX		100		Ohm	Differential, for all frequencies between 1MHz and 125MHz
Rx Input Impedance	Zin,RX		100		Ohm	Differential, for all frequencies between 1MHz and 125MHz
High-Speed Electrical Interface, Host-SFP						
Parameter	Symbol	Min	Typ	Max	unit	Notes/Conditions
Single ended data input swing	Vinsing	250		1200	mV	Single ended
Single ended data output swing	Voutsing	350		800	mV	Single ended
Rise/Fall Time	T _r ,T _f		175		psec	20%-80%
Tx Input Impedance	Zin		50		Ohm	Single ended
Rx Output Impedance	Zout		50		Ohm	Single ended

GENERAL SPECIFICATIONS

General						
Parameter	Symbol	Min	Typ	Max	unit	Notes/Conditions
Data Rate	BR		10		Gb/sec	IEEE 802.3 compatible. See Note 1 below

NOTE:

1. Clock tolerance is +/- 50 ppm

ENVIRONMENTAL SPECIFICATIONS

Automatic crossover detection is enabled. External crossover cable is not required.

Environmental Specifications						
Parameter	Symbol	Min	Typ	Max	unit	Notes/Conditions
Operating Temperature	Top	-40		85	°C	Case temperature
Storage Temperature	Tsto	-40		85	°C	Ambient temperature

EEPROM INFORMATION (A0)


Addr	Field Size (Bytes)	Name of Field	HEX	Description
0	1	Identifier	03	SFP
1	1	Ext. Identifier	04	MOD4
2	1	Connector	07	LC
3-10	8	Transceiver	00 00 00 00 00 00 00 00	Transmitter Code
11	1	Encoding	06	64B66B
12	1	BR, nominal	67	10000M bps
13	1	Reserved	00	
14	1	Length (9um)-km	00	
15	1	Length (9um)	00	
16	1	Length (50um)	08	80
17	1	Length (62.5um)	03	30
18	1	Length (copper)	00	
19	1	Reserved	1E	30
20-35	16	Vendor name	57 49 4E 54 4F 50 20 20 20 20 20 20 20 20 20 20	WINTOP
36	1	Reserved	00	
37-39	3	Vendor OUI	00 00 00	
40-55	16	Vendor PN	xx	ASC II
56-59	4	Vendor rev	31 2E 30 20	V1.0
60-61	2	Wavelength	00 00	850nm
62	1	Reserved	00	
63	1	CC BASE	XX	Check sum of byte 0~62
64-65	2	Options	00 1A	LOS, TX_DISABLE, TX_FAULT
66	1	BR, max	00	
67	1	BR, min	00	
68-83	16	Vendor SN	00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00	Unspecified
84-91	8	Vendor date code	XX XX XX 20	Year, Month, Day
92-94	3	Reserved	00	
95	1	CC_EXT	XX	Check sum of byte 64~94
96-255	160	Vendor specific		

SERIAL COMMUNICATION PROTOCOL

All WINTOP SFPs support the 2-wire serial communication protocol outlined in the SFP MSA. These SFPs use an MCU, and they can be accessed with the address of A0h.

Serial Bus Timing, Requirements						
Parameter	Symbol	Min	Typ	Max	unit	Notes/Conditions
I ² C Clock Rate		0		200,000	Hz	


RECOMMENDED APPLICATION CIRCUIT

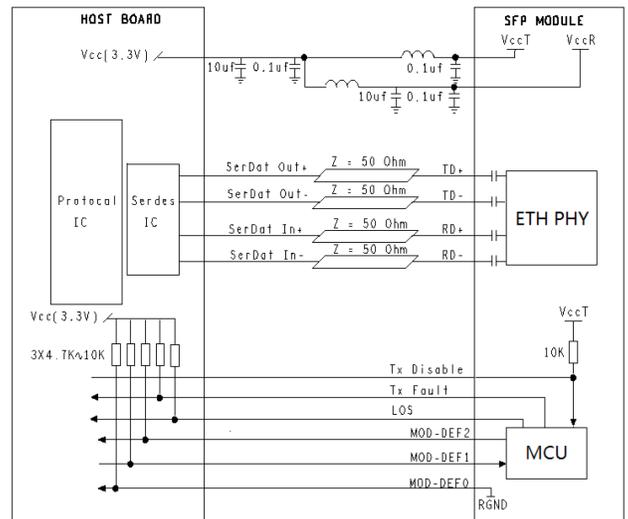

OVERVIEW

10GBASE-T COPPER SFP+ TRANSCEIVER DATA SHEET

OUTLINE DIMENSIONS (mm)

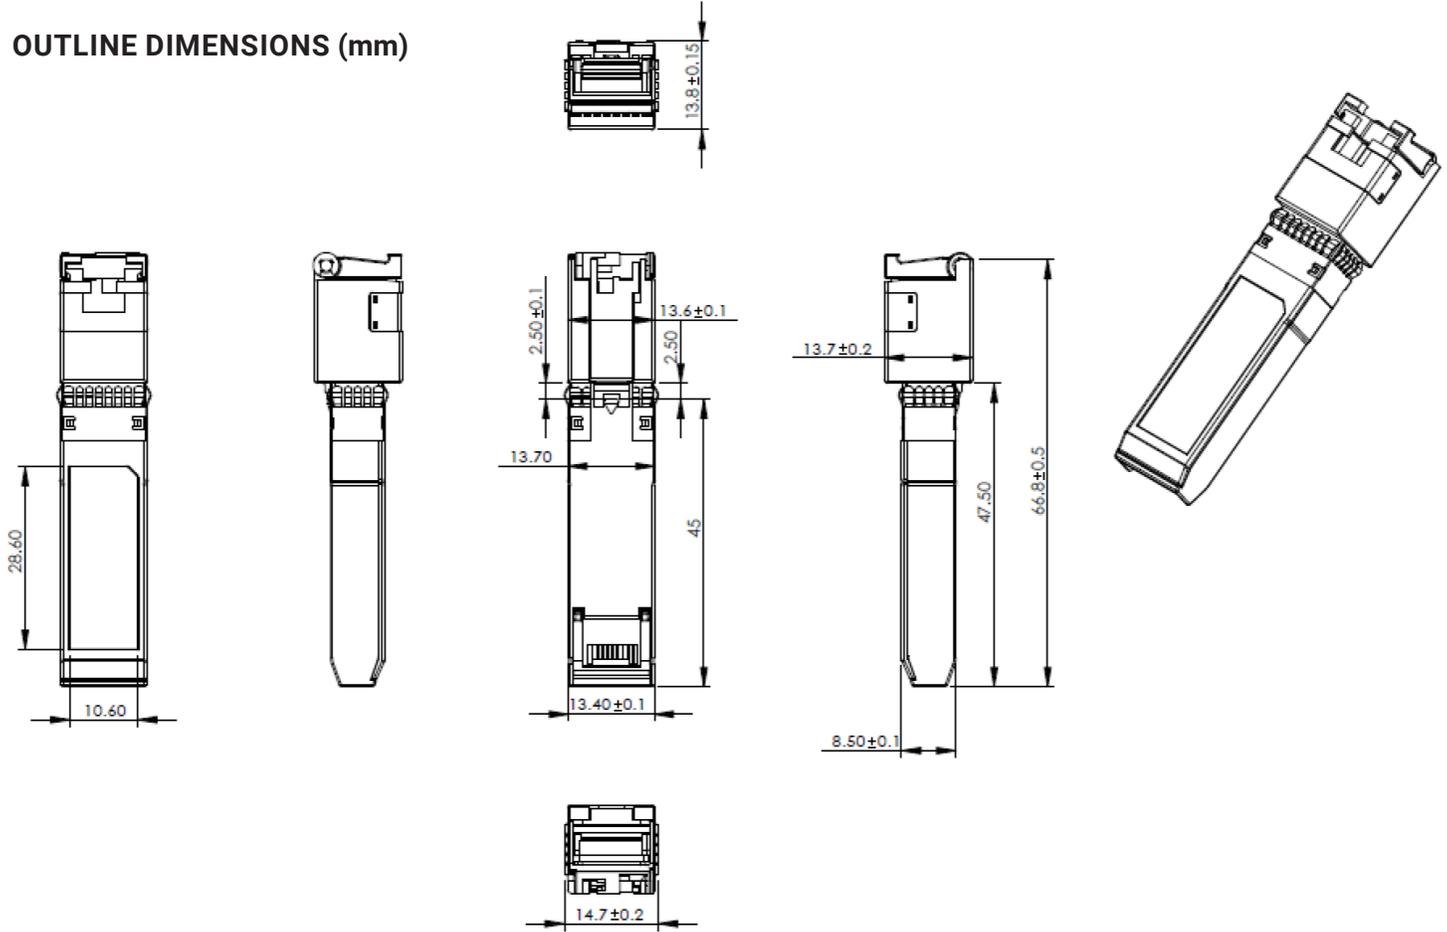

ORDERING INFORMATION

10GBASE-T COPPER SFP+ TRANSCEIVER DATA SHEET

ITEM	CODE
10GBASE-T Copper SFP+ Transceiver	LSP444

ABOUT BLACK BOX

Black Box® is a trusted IT solutions provider delivering cutting-edge technology solutions and world-class consulting services to businesses on every continent. The breadth of our global reach and depth of expertise accelerate customer success by bringing people, ideas, and technology together to solve real-world business problems. Our IT infrastructure solutions, services, and products enable secure, flawless connectivity and meaningful collaboration across town or around the globe. To learn more, visit the Black Box website at <https://www.blackbox.com>. Follow the company on Twitter @BlackBox_ns.

Black Box and the Double Diamond logo are registered trademarks of BB Technologies Inc. All other trademarks referenced herein are the property of their respective owners.

DISCLAIMER

Black Box Corporation shall not be liable for damages of any kind, including, but not limited to, punitive, consequential or cost of cover damages, resulting from any errors in the product information or specifications set forth in this document and Black Box Corporation may revise this document at any time without notice.

TECH SUPPORT/CONTACT INFORMATION

Visit blackbox.com/discover-bb/global-presence for regional technical support and contact information.



EN_NET_DATASHEET_LSP444_REV2_2506.PDF
© COPYRIGHT 2024, 2025. BLACK BOX CORPORATION. ALL RIGHTS RESERVED.

