


REVISIONS		
Rev	DESCRIPTION	DATE
A	INITIAL RELEASE	01/26/2024


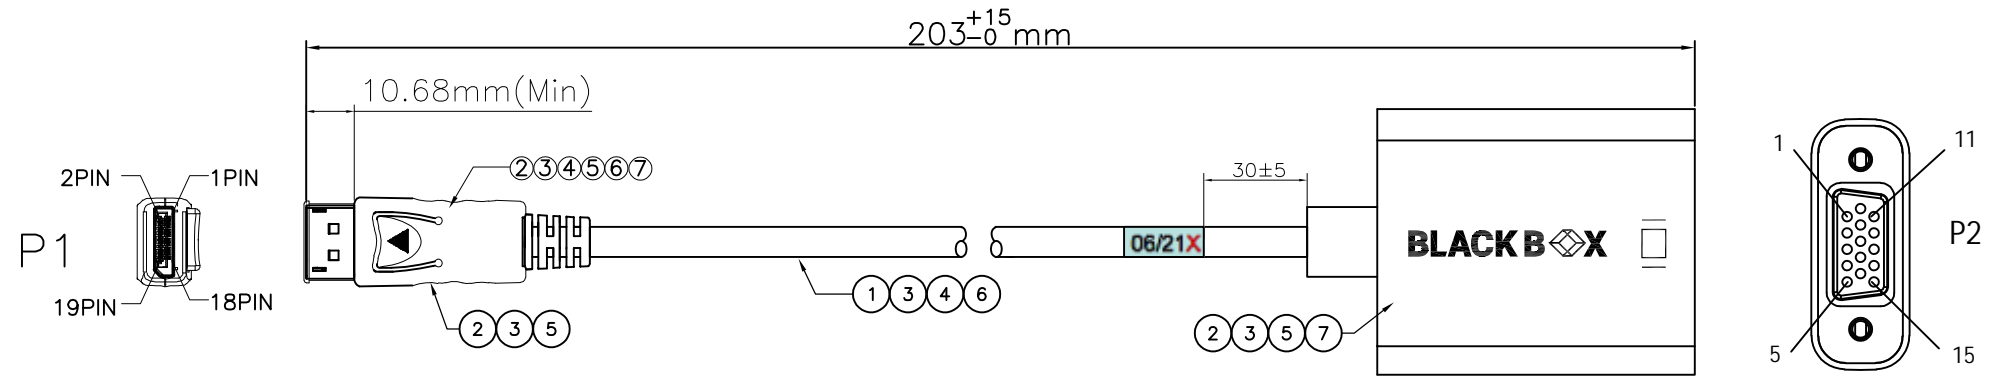


ELECTRICAL TEST :

- 1.100% OPEN & SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE: 2 OHM(MAX)
- 3.INSULATION RESISTANCE:10M OHM(MIN)
- 4.HI-POT TEST:DC 300V/10ms
- 5.100% of image Test

PRODUCT SPECIFICATIONS :

- 1.Connector Type: DisplayPort MALE TO VGA FEMALE
- 2.Connector Plating and Material:
Display Port to VGA Adapter VGA Plug Nickel Plated Terminal+PCB
DisplayPort M Shell Nickel Plated Terminal Gold Plated 3U" Black Insulation
- 3.Color: Black connectors and Black Cable
- 4.RoHS 2.0: Yes
- 5.Resolution Supported: 1920X1200 / 60Hz
- 6.Cable Specifications:
DP~[34AWG(7/0.06TC)*1P+EAM]*3C+32AWG(7/0.08TC)*5C+AEB (16/5/0.12MM 85%AL)OD:4.5MM~Black
- 7.Made in Vietnam

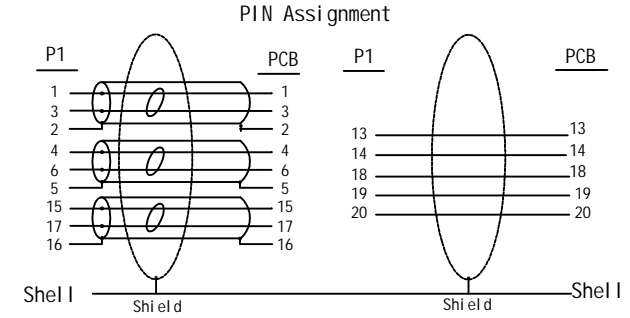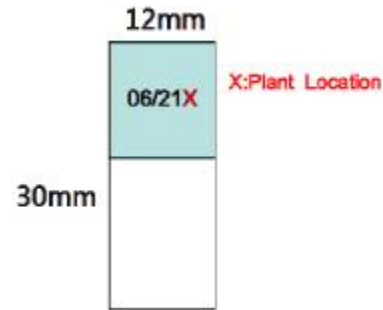

The information contained in this document is the sole property of Black Box Corporation of Pennsylvania. Any reproduction in part or whole without the written permission of Black Box Corp. is prohibited.

©Copyright 2012 Black Box Corporation of Pennsylvania d/b/a Black Box Network Services. All Rights Reserved.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±	
INTERPRET GEOMETRIC TOLERANCING PER	CRS
MATERIAL	POWDER COAT
FINISH	DO NOT SCALE DRAWING



DRAWN	DongMI	DATE	01/26/2024	TITLE: DP to VGA Adapter DP1.1, ABS Housing-Made in Vietnam	
ENG APPR.				SIZE	DWG. NO.
CHECKED				B	EVNDPVGA-MF-R4
COMMENTS:				REV	A
SCALE: 1:1				SHEET 1 OF 1	